

## Dekventilator Deckventilator Decksventilator

## Aerateur de pont Aireadores de cubierta Ventilatore di coperta

Onderzijde van de flens dient te worden voorzien van een dunne laag siliconenkit.



The underside of the flange should be coated with a thin layer of silicon sealant.

Die Unterseite des Flansches muss mit einer dünnen Schicht Silikonkitt versehen werden.


Il faudra appliquer une fine couche de mastic silicone sur la partie inférieure de la bride.

La parte inferior del reborde debe cubrirse con una fina capa de sellador de silicona.

Sul lato inferiore della flangia deve essere applicato un leggero strato di mastice siliconico.

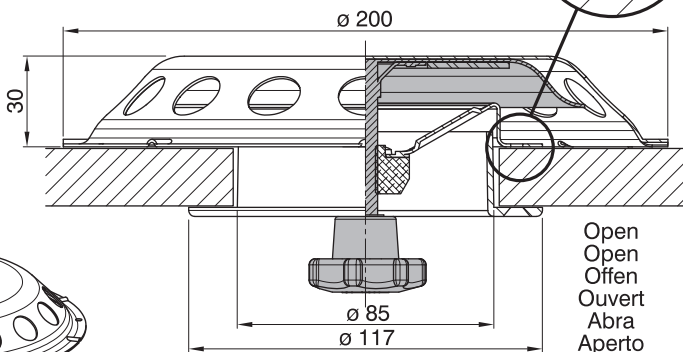


Open  
Open  
Offen  
Ouvert  
Abra  
Aperto

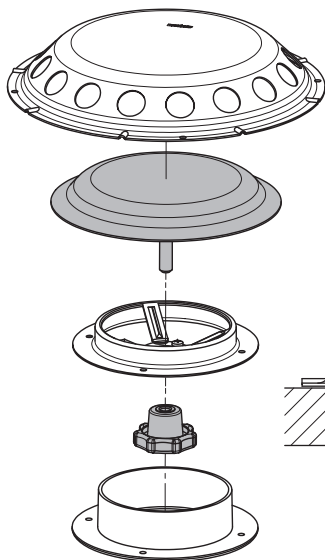

Netto doorlaat  
Net opening size  
Nettodurchlaß  
Passage net  
Conducto neto  
Dimensioni retali relative

Max.  
30.7 cm<sup>2</sup>  
(4.7 sq. ins.)

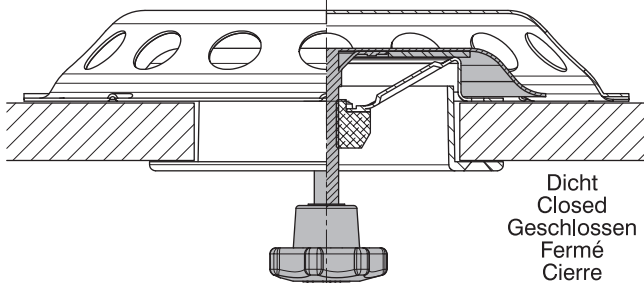

Dicht  
Closed  
Geschlossen  
Fermé  
Cierre  
Chiuso

# vetus den ouden n.v.

FOKKERSTRAAT 571 - 3125 BD SCHIEDAM - HOLLAND - TEL.: +31 10 4377700 - TELEX: 23470  
TELEFAX: +31 10 4372673 - 4621286 - E-MAIL: sales@vetus.nl - INTERNET: <http://www.vetus.com>

Printed in the Netherlands  
080204.01 03-05